


MULTI CUTTER MC200

Break-up work
at a high level

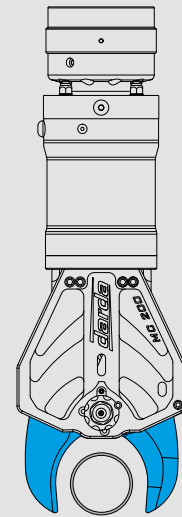

Facts

- 50 t | 110200 lbf cutting force
- Ideal for building core removal
- Simple regrinding of blades
- High productivity
- Low wear costs

Specifications | Multi Cutter MC200

Dimensions and weight		
Length x Width x Height	1000 x 232 x 334 mm	39.4 x 9.1 x 13.1 in
Jaw opening	200 mm	7.9 in
Weight ¹	147 kg	323.4 lb
Carriers		
Recommended carrier weight, max. ²	1,2 - 2,8 t	2640 - 2160 lb
Recommended Brokk machines	Brokk 110 /120D / 170	
Hydraulic connection		
Connection pressure, min.	17,5 MPa	2538 psi
Connection pressure, max.	19 MPa	2756 psi
Oil flow, min. - max.	25 - 60 l/min	7 - 16 gal/min
Rotary drive connection pressure, max.	19 MPa	2756 psi
Rotary drive oil flow, max.	60 l/min	16 gal/min
Operating pressure	19 MPa	2756 psi
Power output		
Cutting force, max.	490 kN (50 t)	110200 lbf
Cutting capacity (selection of profiles)		
⊙ Ø 150 mm	6 in	
┌ 100 x 55 x 6,3 mm	3.9 x 2.2 x 0.25 in	
○ Ø 90 x 4 mm	3.5 x 0.16 in	
— 80 x 8 mm (stainless steel)	3.1 x 0.31 (stainless steel)	

¹ Without mounting plate

² Depending on carrier lifting capacity